

Product: 4GE+1POTS+WiFi5 AC1200 XPON ONU

Model No.: HPT-G3041-R112



High Speed CPU



Low Power Consumption





Software Customization



Optional Shell Supply

Brief Views



HPT-G3041-R112 is an indoor fiber broadband access terminal. The device provides one GPON / EPON adaptive optical port and supports XPON mode. It can be used in connection with our company GPON OLT or EPON OLT. It can also interconnect with the mainstream manufacture (Huawei / ZTE / Fiberhome) GPON or EPON OLT to provide users with Internet, WIFI and VOIP services based on GPON and EPON technology.

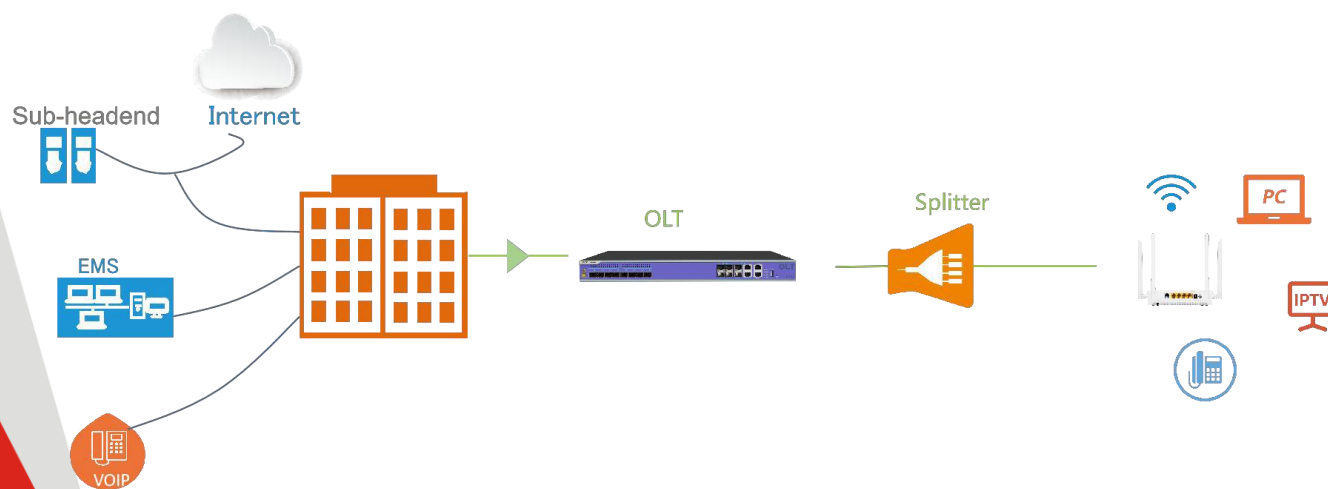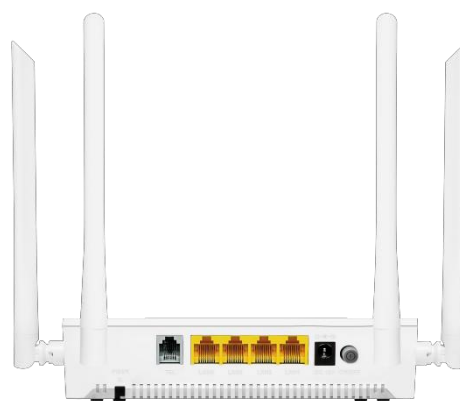

Functional Feature

- In compliant with IEEE802.3ah and ITU - T.G.984 standard
- Support ONU auto-discovery/Link detection/remote upgrade of software
- Support SN and LOID+Password multiple registration methods
- Support port VLAN configuration
- Support port-based rate limitation and bandwidth control
- Support MAC address learning
- Support MAC address learning account limit
- Support VLAN transparent/tag/translate/trunk
- Support broadcasting storm resistance function
- Support igmp transparent/snooping/proxy mode
- Support Dynamic Bandwidth Allocation (DBA)
- Support AES encryption and decryption
- EMS network management based on SNMP, convenient for maintenance
- Support power-off alarm function ,easy for link problem detection
- Support Firewall
- Support MAC address/URL filter
- Support remote WEB/Telnet access control

Product Interface and LED

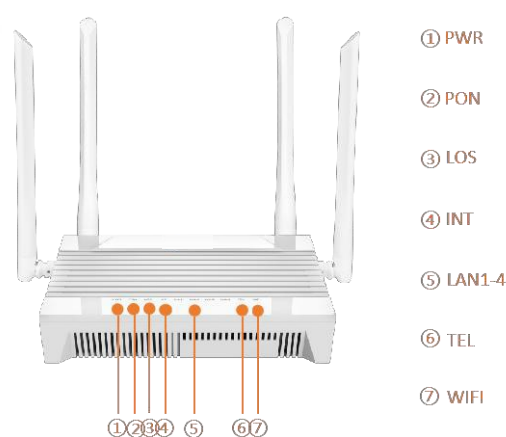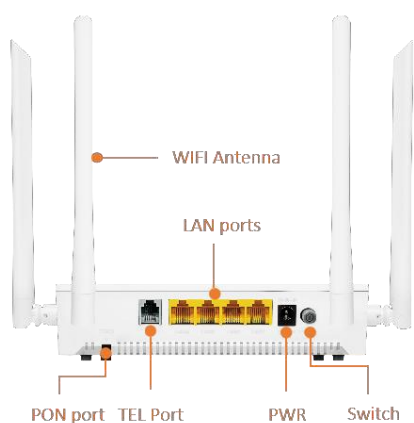

LED Definitions

Indicator		Description
PWR	Power status	On: The ONT is power on; Off: The ONT is Power off;
PON	ONT Register	On: Success to register to OLT; Blinking: In process of registering to OLT; Off:Failed to register to OLT or no normal optical signal input;
LOS	PON optical signals	On: Optical power lower than receiver sensitivity; Off: Optical in normal;
LAN1-4	LAN port status	On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up;
INT	Internet status indicator	On: The routed WAN Internet access service is normal. Off: The routed WAN Internet access service is abnormal.
WIFI	WIFI	Blinking :Data is being transmitted On:WIFI function Opens
TEL	Telephone port status	On:The connection between the TEL port and the voice server has been set up Blinking:The voice service of the TEL port is established; Off:The connection between the TEL port and the voice server is not set up.

Product Specification

Mechanics	
Dimensions	170mm(L)*120mm(W)*41mm(H)
Weight	About 300g

Hardware		
User Port (LAN)	RJ-45 connector	
	4 *10/100/1000Mbps adaptive Ethernet port	
	Full/half duplex	
	Auto MDI/MDI-X	
Indicators		
PWR / PON / LOS / LAN1-4 / INT / TEL / WIFI		
PON Port	PON Mode	EPON: 1000BASE-PX20+ symmetric GPON: FSAN G.984.2 standard,Class B+
	PON Rate	EPON: 1.25Gbps downstream/upstream GPON: 2.488Gbps/1.244Gbps downstream/upstream
	Wavelength	Transmit: 1310nm Receiver: 1490nm
	Receiving sensitivity	EPON: -27dBm GPON: -28dBm

	Saturated power	EPON: -3dBm	GPON: -8dBm
	Transmitting power	EPON:0~4dBm	GPON: 0.5~5dBm

User Port(POTS)	
RJ-11 connector	
1*accounts	
SIP protocol	
TDMF	
G711U/G711A/G729/G722 encoding and decoding	

WIFI performance parameter_s	
IEEE802.11b/g/n(2.4G)	
IEEE802.11a/n/ac(5G)	
Max rate: 300M(2.4G)	
Max rate: 867Mbps(5G)	
MAX TX power 2.4G:17dBm	
MAX TX power 5G:17dBm	

Environment	
Working temperature	0 to 40° C
Operating humidity	10% ~ 90% (Non-condensing)

Power	
External 12VDC/1.5A power supply adapter	
Power consumption	≤9.7W